



ALIEN™

www.aliensia.com



AT-288

Library, Logistics, Military, etc.

Series Highlights:

- 16bit RISC MPU
- Bluetooth SPP and HID with Windows PC, Tablet, Android and iPhone
- USB
- RFID UHF 900MHz GEN2, ISO/IEC 18000-6C / 18000-6B (Option)
- Cradle
- EPC Data Stored Mode Support

(주)에일리엔테크놀로지아시아

본 사 : 서울특별시 금천구 디지털로9길 99, 909(가산동, 스타밸리)
전 화 : 707-7012-1317 | 팩스 : 02-868-1710 | MAIL : support@aliensia.com

AT288

Library, Logistics, Military, etc.



SPECIFICATION

Performance Characteristics

Processor	16bit RISC MPU
Operating System	None
Memory	about 146Kbyte (30byte EPC data x 5,000 count store)
Display	LED Indicator
Weight	180g (without battery)
Operating Temp.	-20°C ~ 60°C
Storage Temp.	-30°C ~ 70°C
Humidity	95% non-condensing
Drop Spec.	1.5M.Drop to concrete
Dust & Water Proof	IP65

Physical Characteristics

Audio	Buzzer (integrated)
Standard I/O Port	Bluetooth, USB Client
Notification	LED, Buzzer
Dimensions(L x W x H)	105.6 x 53.5 (61) x 23.2 (60.3)mm

Battery Supply

Main Battery	Lithium-ion 3.7V 2,260mAh (Rechargeable)
Power Adapter	Input AC110V ~ 240V / Output DC 5V 2A

Network Characteristics

Communication	Bluetooth / USB
---------------	-----------------

UHF 900Mhz RFID Reader/Writer

Frequency	860MHz ~ 960MHz
Reading range	0M ~ 5M (According to Tag & Environment)
Writing range	0M ~ 3M (According to Tag & Environment)
RF output	1W EIRP
Protocol	EPC Gen2, ISO / IEC 18000-6C, 18000-6B*
Special function	Anti-Collision


Cradle

Standard Interface	USB 1.1 Host/ USB Client / DC Power jack / Extra Battery Charger
Ethernet Interface	RJ-45 Ethernet Interface*

Accessories*

Standard Accessories : Stylus Pen, LCD Protec Flim, Hand Strap
Optional Accessories: Vehicle Cradle, Leather Case, Cigar Charger

ACCESSORIES

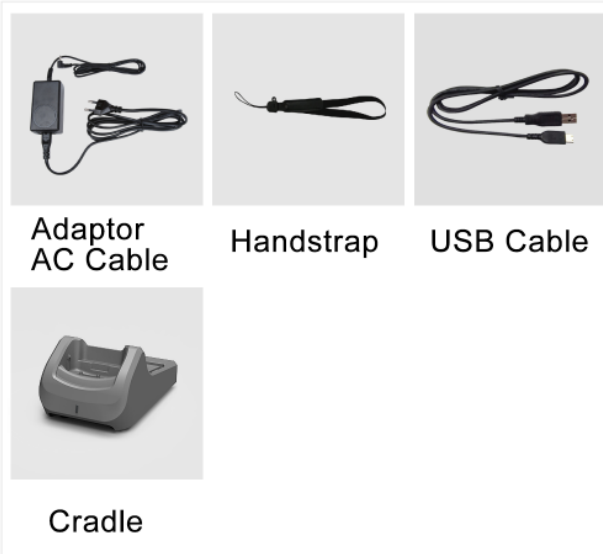

Adaptor
AC Cable

Handstrap

USB Cable

Cradle



* Some Function and parts will be options / ✕ All Features and specifications described are subject to change without notice.